

DANYS KNITWEAR LTD.

Surabari, Kashimpur, Gazipur sadar, Gazipur.


(23.976718N, 90.312467E)

27th October 2015




Observations

Overloaded storage areas



Observations

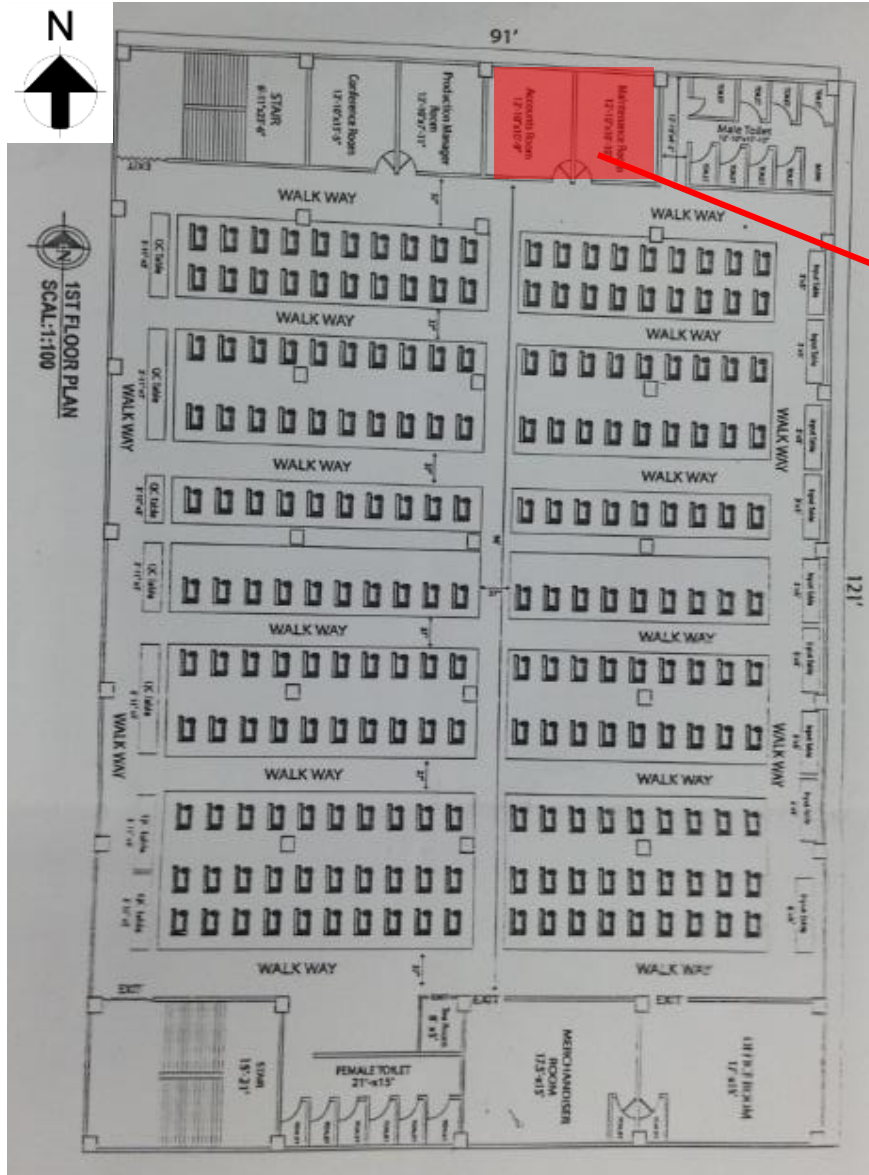


1st Floor. Uncontrolled storage area

Observations

Cracks on the beams and partition walls




2nd Floor. Horizontal crack on the beam

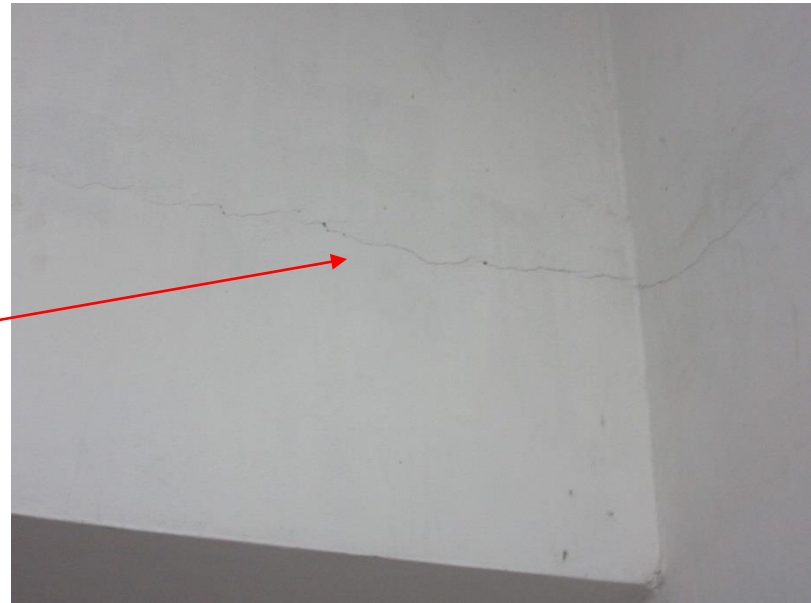




1st Floor. Horizontal crack on the partition walls

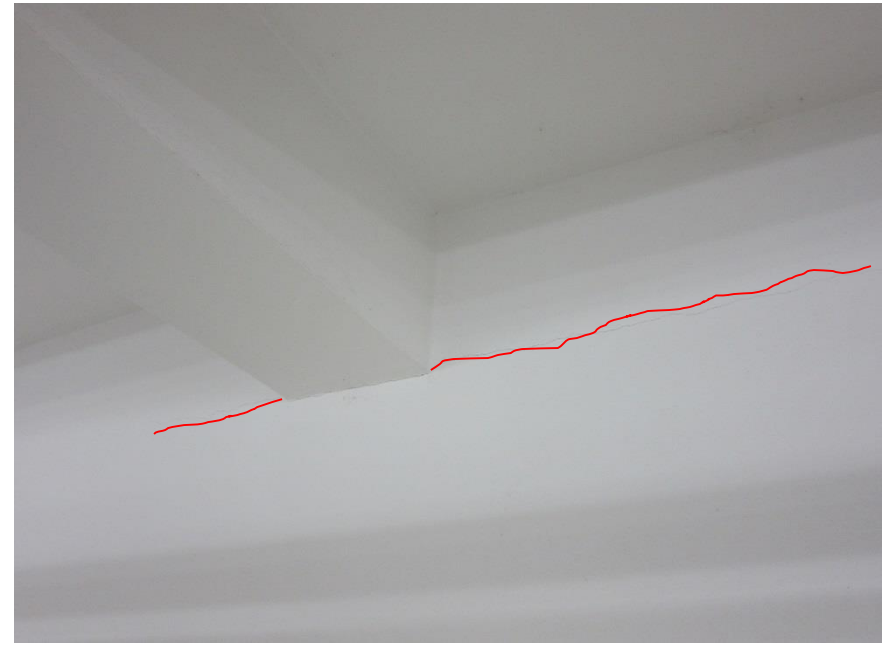

1st Floor. Horizontal crack on the partition walls

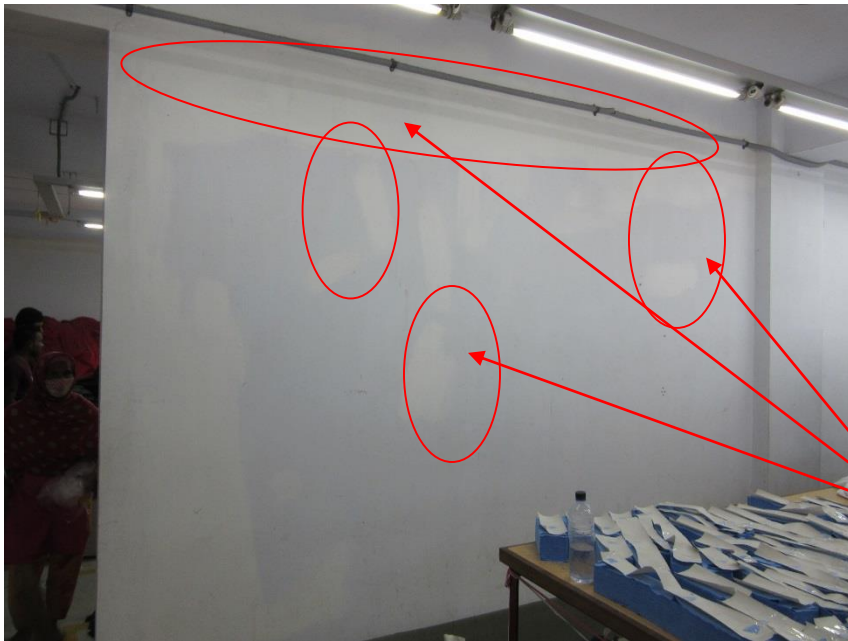

2nd Floor. Visible repairs on the partitions

Priority Actions

Problems Observed

ITEM 1: Overloaded storage areas

ITEM 2: Cracks on the beams and partition walls

Item No.	Observation	Recommended Action Plan	Recommended Timeline
1	Overloaded storage areas	The quantity of the stored materials must be reduced to the level specified by the original designer	6-weeks
2	Overloaded storage areas	Building Engineer to provide a Load Plan for each level	6-weeks
3	Overloaded storage areas	Reduce loading to the recommendations of the loading plans	6-months
4	Cracks on the beams and partition walls	Remove the plaster and engage an Building Engineer to investigate the cracks on the beam	6-weeks
5	Cracks on the beams and partition walls	Repair cracks on the partition walls	6-months